

Manual Call Point (Resettable Type)

FIRE
ALARM
SYSTEMS



MODEL: HC-3WA

Features

1. Alarming by manual pressing, reset by a special key
2. Re-settable (non-breaking glass)
3. With alarm indicating LED and checking bar turn Red
4. Friendly installation and test

Specifications

Operating Voltage	24VDC
Standby Current	0mA
Alarm Current	≤30mA(equivalent resistance is 470Ω/1W)
Visual Indicator	Red Illuminates and checking bar turn Red after alarming
Application	Indoor use
Dimension (LxWxH)	97x93x49mm(with back box)

Installation

Surface mounting:

1. First install the back box onto the wall using screws.
2. Connect cable to manual call point body shown in Fig. 1.
3. Combine the body and back box by tenon.

Flush mounting: It is not suitable.



Wiring and Connection

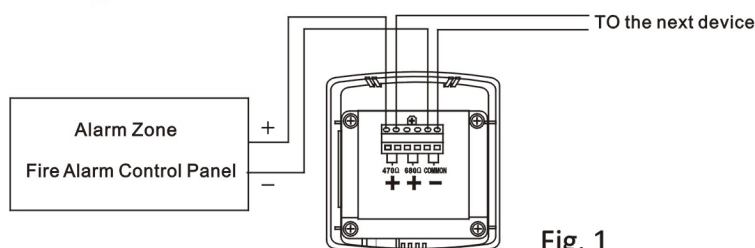


Fig. 1




Fig. 2