

Manual Call Point (Break Glass)

FIRE
ALARM
SYSTEMS



MODEL: HC-3WB

Features

1. Alarming by manual pressing
2. After pressing, glass break inside
3. With alarm indicating LED
4. Friendly installation and easy to replace glass

Specifications

Operating Voltage	24VDC
Standby Current	0mA
Alarm Current	≤30mA(equivalent resistance is 470Ω/1W)
Visual Indicator	Red Illuminates and checking bar turn Red after alarming
Application	Indoor use
Dimension (LxWxH)	97x93x49mm(with back box)

Installation

Surface mounting:

1. First install the back box onto the wall using screws.
2. Connect cable to manual call point body shown in Fig. 1.
3. Combine the body and back box by tenon.

Flush mounting: It is not suitable.



Wiring and Connection

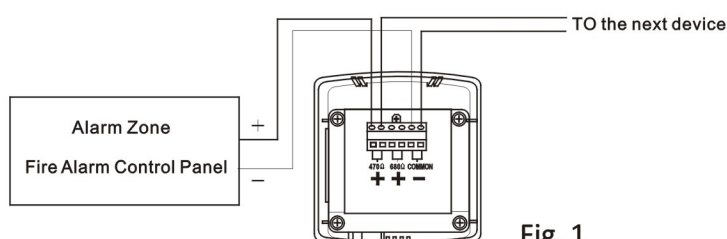


Fig. 1